

BRIO 5CCT

Adjustable 5CCT Downlight

A favorite for residential and commercial applications, the Brio 5CCT becomes a 5-in-1 fixture with 5 selectable white color temperatures. With up to 900 lumen output performance and available in 4” and 6” remodel trim sizes, the Brio provides an ideal solution for tight spaces with its small height and included remote junction box.

- Excellent color rendering (90+ CRI)
- Aluminum housing with polycarbonate lens
- Five Selectable color temperatures:
2700K / 3000K / 3500K / 4000K / 5000K
- Lumen output up to 900 Lumens
- Dimmable with most TRIAC/CL/ELV Dimmers
- Remote driver with hardwire junction box
- Spring loaded mounting clips
- Type IC and cETLus Listed for wet locations
- 50,000 hours rated life
- ENERGY STAR certified
- JA8 Compliant



PROJECT:

TYPE:

LOCATION:

CATALOG NUMBER:



BRIO 5CCT

BRIO 5CCT SERIES QUICK SPECS


| | |
|----------------|--|
| VOLTAGE | 120V AC, 60Hz |
| WATTAGE | 9W / 12W |
| LUMENS | 600Lm / 900Lm |
| CCT OPTIONS | 2700K / 3000K / 3500K / 4000K / 5000K |
| CRI | 90+ |
| MOUNTING | Remodel Recessed mount |
| DIMMING | TRIAC / CL / ELV (10 - 100%) |
| BEAM ANGLE | 110° |
| OPERATING TEMP | -13°F (-25°C) to +113°F (+45°C) |
| CERTIFICATIONS | cETLus Listed - Wet Location - Type IC |
| RATED LIFE | 50,000 Hours |

*LUMENS LISTED BASED ON 4000K CCT SETTING


BRIO 5CCT SERIES ORDERING INFORMATION

| ITEM NUMBER | DESCRIPTION | FINISH | VOLTAGE | CCT | CRI | LUMENS | WATTAGE | DIMMING |
|--------------|--------------|--------|---------|------|-----|--------|---------|---------|
| BRD4-5CCT-RD | 4" Brio 5CCT | White | 120V | 5CCT | 90+ | 600Lm | 9W | 10-100% |
| BRD6-5CCT-RD | 6" Brio 5CCT | White | 120V | 5CCT | 90+ | 900Lm | 12W | 10-100% |

BRIO 5CCT SERIES QUICK DIMENSIONS AD56

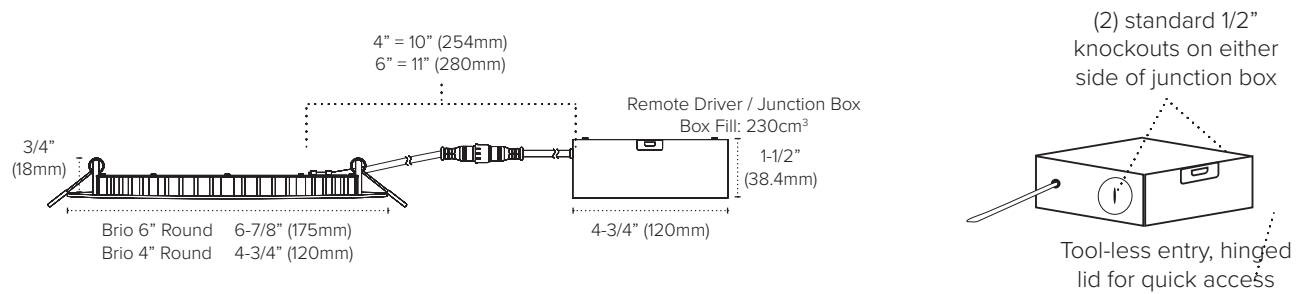

| HOLE CUT SIZES | 4" BRIO | 6" BRIO |
|----------------|---------------------------------|---------------------------------|
| Round | 4-3/8" (111mm) Diameter - Round | 6-1/4" (160mm) Diameter - Round |

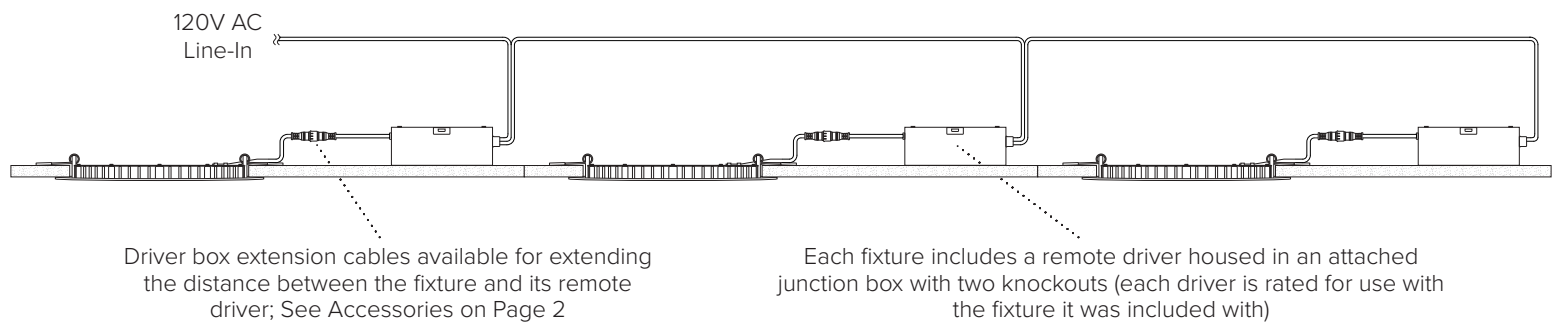

BRIO 5CCT SERIES ACCESSORIES

| Image | Part Number | Description |
|-------|-------------|---|
| | RP-2/4/6 | Steel rough-in plate w/hangar bars for 2" / 4" / 6" use |