

VIBE BACK TO WALL 5828

58" x 28" x 21" (FREESTANDING)

Vibe is a collection of therapeutic bathtubs with minimalist and contemporary flair. The collection is perfect for urban city dwellers who want to bring value and refinement to smaller bathrooms.



PRODUCT NO.

MODEL	TMU	TUB
BTW - Left	BVBCHWOLT-XX	BVBCHW0LN-XX
BTW - Right	BVBCHWORT-XX	BVBCHW0RN-XX
Front overflow - Left	BVFCHWOLT-XX	BVFCHW0LN-XX
Front overflow - Right	BVFCHWORT-XX	BVFCHW0RN-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$9,155
Jets	40
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	\$430
Geysair®	Included
AromaFlow*** BAROMAF NEW	\$950
Illuzio Chromatherapy BCHRO6	\$925

TUB Soaker	\$6,705
AromaFlow*** BAROMAF NEW	\$950
Illuzio Chromatherapy BCHRO6	\$925
WarmTouchShell® BWTS	\$1,125
DOT control	Included with therapy

FEATURES

Installation type	Freestanding (Back to wall)		
No. of bathers		Imp. gallons	36
US gallons	44		

INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

White 01 , Chrome 07 , Brushed Nickel 09 , Polished Nickel 10 , Matte White with UltraVelour finish 32	Installed & Included
--	----------------------

STANDARD COLOR

	White 01	Included
--	--------------------------	----------

OPTIONS (UPCHARGE APPLICABLE)

COLOR

	Black / White 66	\$475
--	----------------------------------	-------

FINISH

UltraVelour Matte Finish (white only) BVEL2	\$850
---	-------

UNIVERSAL ARMRESTS [BGBGU-XX](#)

White 01	\$750
--------------------------	-------

INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

Matte Black 19 , Satin Brass 18	\$120
---	-------

ISLAND TUB DRAIN™**

Island Tub Drain™ BISLDD	\$260
Cast Iron Island Tub Drain™ BISLDDCI	\$310

IF REQUIRED BY CONSTRUCTION CODE

Brass waste & overflow kit BDRCOB	\$240
Brass waste kit BDRCB	\$60



Don't forget to specify the **finish of the integrated waste & overflow.**

* Control must be wall-mounted. Faucets must be freestanding or wall-mounted.


** An Island Tub Drain™ is required when there is **no access under the bath.**

*** When ordering an AromaFlow, an Integrated waste & overflow is mandatory (Included). Specify the finish of the waste.

FOR THE INSTALLER

SCAN TO VIEW INSTALLATION VIDEO (3:20 MIN)



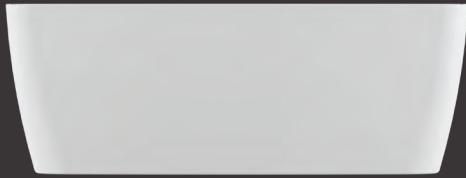


Front Overflow - Right

VIBE BACK TO WALL 5828 (FREESTANDING)



BTW - Right

INSTALLATION

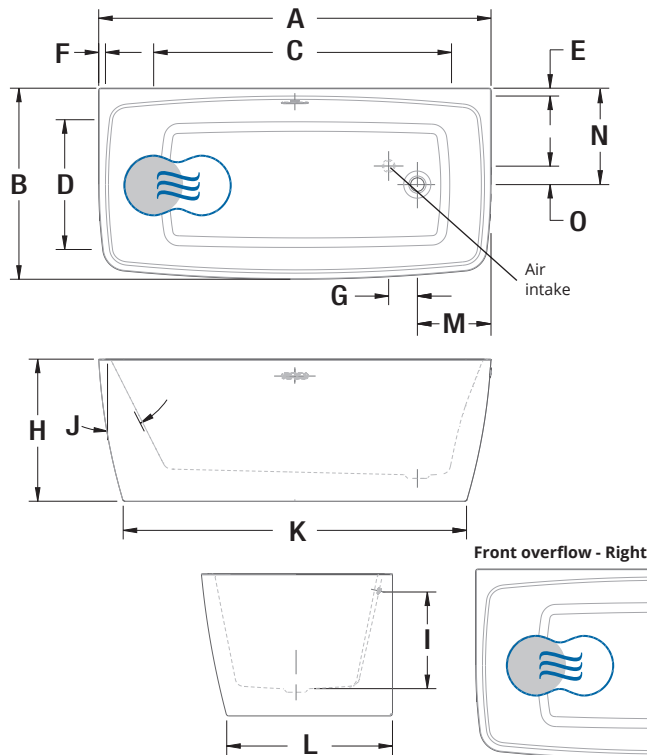

LETTER	DESCRIPTION	MEASURE
A	Total length	58"
B	Total width	28 1/4"
C	Bathing well length	44"
D	Bathing well width	19 1/8"
E	Deck width to wall	1 1/8"
F	Deck width at headrest	1"
G	Center drain to air intake	4 1/4"
H	Total height	21"
I	Maximum water level Maximum water level with AromaFlow	14 5/16" 12 1/2"
J	Slope of backrest	27°
K	Base length	50 3/4"
L	Base width	24 1/2"
M	Outside edge to center bath drain	10 7/8"
N	Outside edge (wall) to center bath drain	14 1/4"
O	Center drain to center air intake	2 3/4"

- Indicates heated backrest (TMU)
- ☁ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The Geysair® is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - Faucet must be freestanding or wall-mounted. - The turbine must be remotely installed. - Controls cannot be installed on the deck of the bath. - The water level will be lower when an AromaFlow is installed.

Cutting template	# 90000079
Approx. shipping weight	225 lb
Turbine power	550 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.