


Fixture Diagram

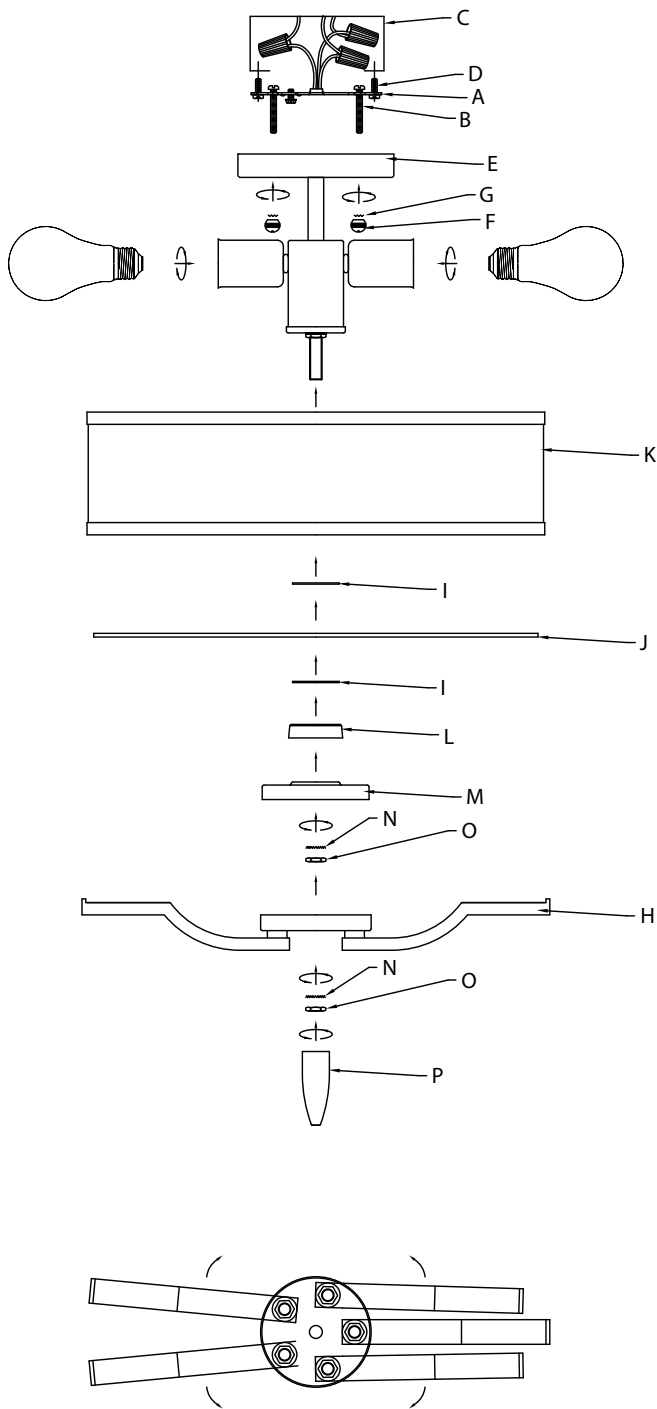

Parts List

- | | | |
|----------------------------------|---------------------------|------------------------|
| [A] Mounting Strap | [E] Canopy | [L] Trim |
| [B] Mounting Screws | [F] Knobs | [M] Trim |
| [C] Outlet Box | [G] Lockwashers | [N] Hexnut |
| [D] Strap Mounting Screws | [H] Fixture Arms | [O] Lock Washer |
| | [I] Rubber Washers | [P] Finial |
| | [J] Circular Glass | |
| | [K] Shade | |

Cautions

CAUTION – RISK OF SHOCK –
 Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.


WARNING:
 This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended.

Installation Instructions

- 1) Find the appropriate threaded holes on mounting strap **[A]**. Assemble mounting screws **[B]** into threaded holes.
- 2) Attach mounting strap to outlet box **[C]** using the strap mounting screws **[D]**. The mounting strap can be adjusted to suit position of fixture.

- 3) Grounding instructions: (See Illus. a or b).
 - a) On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
 - b) On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, then thread into mounting strap.


If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector (Not provided) after following the above steps. Never connect ground wire to black or white power supply wires.

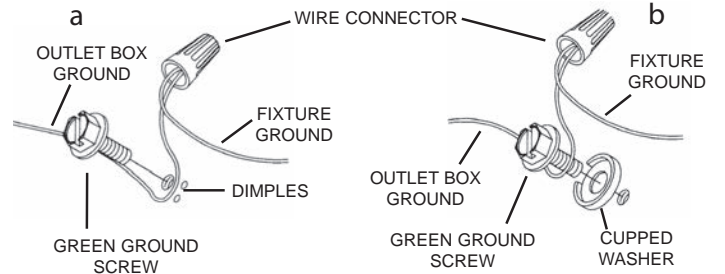

- 4) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wire (SPT 1 & SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)

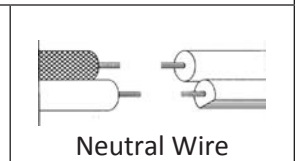

- 5) Push fixture to ceiling, carefully passing mounting screws through holes in canopy **[E]**. NOTE: Be certain wires do not get pinched between canopy and ceiling.
- 6) Use knobs **[F]** and lockwashers **[G]** to secure canopy. Tighten to secure.
- 7) Rotate the fixture arms **[H]** into the correct position.
- 8) Insert recommended bulb(s) (Not supplied).
- 9) Take one of the rubber washers **[I]** and slide up onto the bottom of the main body over the threaded pipe.
- 10) Take the circular glass **[J]** and place the shade **[K]** onto the glass and raise up over the threaded rod up to the rubber washer.
- 11) Take the remaining rubber washer and place up against the bottom of the glass, take the trim **[L]** and trim **[M]** and slide up to the rubber washer and secure into place with the hexnut **[N]** and lockwasher **[O]**.
- 12) Take the fixture arms **[H]** and place over the trim pieces as shown. Secure into place with a hexnut **[N]** and lockwasher **[O]**.
- 13) Install the finial **[P]** over the installed hexnut.

