

# NLSTR-4L1334W

LED Tunable Strip Light - Selectable CCT

Source: 24W LED  
3300lm

Type

Project

Catalog No.

Notes

## PRODUCT DESCRIPTION

4' Industrial LED Tunable Strip Light includes an integral CCT switch to change the color temperature at any time! Ideal for commercial, residential, industrial and retail applications. The luminaire's lens is designed to evenly spread the light in a complete 120° beam pattern. The smooth lens makes for easy maintenance and no diode image. NLSTR can be used in storage or utility buildings, coves, display cases, workshops and garages for task and general lighting.

## FEATURES

- cETLus Listed
- Field selectable color temperature (3000K / 3500K / 4000K)
- 0-10V dimming
- 120-277V input
- DLC Listed
- Optional emergency and motion sensor

## SPECIFICATION

**Construction:** Steel stamped body. Finished in white powder coat. Top, end and side knockouts.

**Mounting:** Luminaires can be surface mounted or suspended with pendant kit (ordered separately: NLSTRA-PK).

## ELECTRICAL

**Input Voltage:** 120-277V

**Lumens / Wattage:** 3300lm / 24W

**Color Temperature:** Selectable CCT (3000K / 3500K / 4000K)

**Color Rendering Index:** 80+ CRI

**Beam Spread:** 124° Wide Flood

**Operating Temperature:** 0°C to 40°C

**Lifetime:** 60,000 hours @ L70

**Dimming:** 0-10V

## OPTIONAL ACCESSORIES

**NLSTRA-JBCW:** Junction Box Cover Plate, White finish

**NLSTRA-PK:** Pendant Kit (aircraft cable and hooks)

**NLSTRA-MSCONT:** Remote Control for NLSTR-4L1334W/MS (not required)

**NLSTRA-MSCONT2:** Remote Control for NLSTR-4L1334W/EMMS (not required)

**Optional motion sensor:** Microwave motion sensor can detect motion up to 37' away and 60° under the luminaire. After 30 seconds of no motion, the fixture output will be reduced to 50% output for another 30 seconds before automatically turning off. Remote control can be used to change motion sensor settings (ordered separately). After each power cycle, the fixture will perform a start-up cycle.



**Emergency:** Luminaire can be specified with an emergency battery with integral test switch. Battery operates luminaire at 8W for 90 minute emergency operation on fully charged battery.

## LABELS AND LISTINGS

- DLC Listed (Direct Linear, Stairwell and Passageway)
- cETLus Listed for Damp Locations
- 5-Year Limited Warranty
- FCC Compliant



## PRODUCT IMAGES & DIMENSIONS

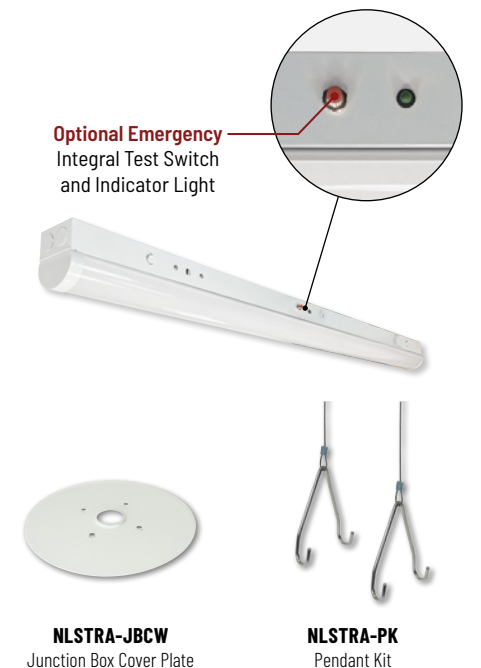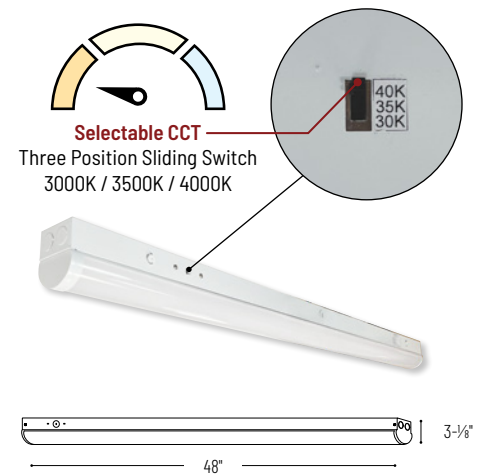

**NLSTRA-JBCW**  
Junction Box Cover Plate

**NLSTRA-PK**  
Pendant Kit



**NLSTRA-MSCONT**  
Remote Control for  
NLSTR-4L1334W/MS



**NLSTRA-MSCONT2**  
Remote Control for  
NLSTR-4L1334W/EMMS

## LED Tunable Strip Light - Selectable CCT

Length / Lumens / Wattage	Options
NLSTR-4L1334W = 4' / 3300lm / 24W	<b>(blank)</b> = Standard <b>/EM</b> = Integral Emergency <b>/MS</b> = Integral Motion Sensor <b>/EMMS</b> = Integral Emergency and Motion Sensor

## Optional Accessories

Description
<b>NLSTRA-JBCW</b> = Junction Box Cover Plate, White finish
<b>NLSTRA-PK</b> = Pendant Kit (aircraft cable and hooks)
<b>NLSTRA-MSCONT</b> = Remote Control for NLSTR-4L1334W/MS (not required)
<b>NLSTRA-MSCONT2</b> = Remote Control for NLSTR-4L1334W/EMMS (not required)

Example: **NLSTR-4L1334W** = 4' LED Tunable Strip Light, 3300lm / 24W, White Finish