




Incandescent Trim

**6" 45 Degree Sloped Ceiling
Baffle Trim
IC**

Recessed

| | | | | |
|-------|--------------------------|--------------------------|--------------------------|--------------------------|
| Type | _____ | | | |
| | -20 | -28 | -31 | -36 |
| P8004 | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

| Catalog No. | Finish | | | | Dimensions (Inches) | |
|-------------|-------------------|-------|-------|----------|---------------------|--------|
| | Antique Bronze | White | Black | Chestnut | A | B |
| P8004 | -20 | -28 | -31 | -36 | 8-1/4 | 6-7/16 |

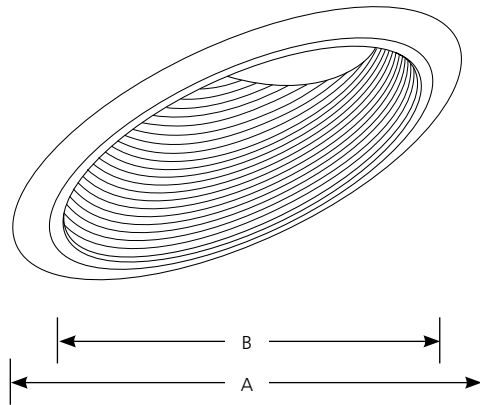

Lamp Wattage

| Housing | IC | Non-IC |
|---------|--------------------|--------------------|
| P645-TG | 75w PAR30/65w BR30 | 75w PAR30/65w BR30 |
| P745-TG | N/A | 75w PAR30/65w BR30 |
| P745-IC | 75w PAR30/65w BR30 | 75w PAR30/65w BR30 |

Specifications:

Flange

- Bright white powder painted cast aluminum flange
- Covers irregular ceiling openings

Trim

- All cast aluminum construction
- Single spring installation
- Aluminum die cast deep-groove baffle
- Lamp adjustable from below for perpendicular orientation in 9 to 45 degree (2/12 to 12/12) ceilings

Options

- Bronze Baffle - specify P8004-20
- White Baffle - specify P8004-28
- Black Baffle - specify P8004-31
- Chestnut Baffle - specify P8004-36

Labels

- UL-CUL damp location listed

Photometrics

- Refer to PAR30 & BR30 Lamp Application Data

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 8/10